

Deposit cabinet S2-450 series

Key features

- Burglary protection S2 according to European Standard EN 14450 (ECB-S)
- Security locking system and floor anchoring against burglary, theft and unauthorized access.
- Electronic code lock, EN 1300 Class A
- Lockable deposit compartment
- Standard colour light grey, RAL 7035
- Floor anchoring

Specifications

Model	S2-450
Height (mm)	450
Width (mm)	445
Depth (mm)	400
Weight (kg)	40



Drop safes E-400 series

Key features

- Adjustable security solution for shops, restaurants, banks and cash service companies
- Manufactured according to European Standard EN 1143-1 to Grades I and II
- Adjustable deposit slot size: 0–70 mm (H) x 350 mm (W) x 400 mm (D)
- Safes are equipped with unpickable keylocks including two keys
- Manipulation prevention mechanism
- Lightweight – easy to install
- Floor-anchoring
- Standard colour light grey, RAL 7035
- Right- or left-handed opening

Options and fittings

- Combination lock or electronic code lock
- Option for two locks
- Lockable deposit gate
- Lockable compartments
- Shelves and other internal fittings



Specifications

Model	E1-410, E2-410	E1-420, E2-420	E1-430, E2-430
External			
Height (mm)	595	945	1295
Width (mm)	585	585	585
Depth (mm)	530	530	530
Internal			
Height (mm)	493	843	1193
Width (mm)	486	486	486
Depth (mm)	364	364	364
Volume (l)	87	149	211
Weight (kg) E1	150	180	210
Weight (kg) E2	180	230	280

Deposit safes E-400 series

EN 1143-2 Grades D-I and D-II



Key features

- Designed for daily cash depositing
- Certified according to European Standard EN 1143-2 to Grades D-I and D-II
- Specially designed against manipulation
- Floor anchoring for additional security against removal of the safe
- Limited access to contents of the safe
 - deposit customers have no access into the safe
- Supplied with Varos keylocks
- Standard colour light grey, RAL 7035
- Maximum deposit bag size 45 (H) x 235 (W) x 155 (D)
- Rear- or front-facing drawer
- Right- or left-handed opening

Options and fittings

- The safes can be equipped with electronic code locks or combination locks – option for two locks
- Deposit drawer keylock
- Kaso Cinema, camera monitoring solution for user and deposit process verification
- Lockable compartments, shelves and other internal fittings
- Seismic detectors, micro switches and other security solutions
- Connections to external alarm systems



Specifications

Model	E2-410 DP	E2-420 DP	E2-430 DP
External			
Height (mm)	915	1265	1615
Width (mm)	585	585	585
Depth (mm)	530	530	530
Internal			
Height (mm)	493	843	1193
Width (mm)	486	486	486
Depth (mm)	364	364	364
Volume (l)	87	149	211
Weight (kg) Euro D-II	410	460	510
Deposit drawer height (from bottom)	762	1112	1462

Deposit safes PTK E-300 series

EN 1143-2 Grade III

Key features

- Designed to provide high-security deposit safety in retail outlets and service points
- Certified according to European Standard EN 1143-2 to Grade III
- Specially designed against manipulation
- Floor-anchoring for additional security against removal of the safe
- Limited access to contents of the safe
 - deposit customers have no access into the safe
- Standard colour light grey, RAL 7035
- Maximum deposit bag size: 45 mm (H) x 235 mm (W) x 155 mm (D)
- Right- or left-handed opening
- Rear- or front-facing deposit



Options and fittings

- The safes can be equipped with electronic code locks or combination locks
- Option for two locks
- Deposit drawer keylock
- Kaso Cinema, camera-monitoring solution for user and deposit process verification
- Lockable compartments, shelves and other internal fittings




Specifications

Model	PTK E3-310 DP	PTK E3-320 DP	PTK E3-330 DP
External			
Height (mm)	912	1262	1612
Width (mm)	634	634	634
Depth (mm)	550	550	550
Internal			
Height (mm)	493	843	1193
Width (mm)	486	486	486
Depth (mm)	364	364	364
Volume (l)	87	149	211
Weight (kg) Grade III	490	580	670
Deposit drawer height (from bottom)	762	1112	1462

Night deposit safes PTK E-300 series

EN 1143-2 to Grade N-IV (ECB-S)

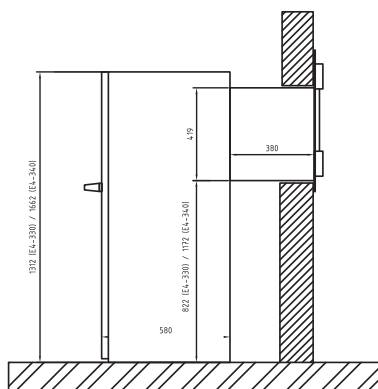

Key features

- Specially designed for banks
- 24-hour surplus cash depositing
- Night deposit safes are tested according to European Standard EN 1143-2 to Grade N-IV (ECB-S)
- Also security grade V available
- The safe has two Varos keylocks
- Floor-anchoring
- Armoured installation frame for easy mounting, wall thickness up to 350 mm
- Lightweight solution thanks to Kaso's BFP® construction
- Easy and fast assembly to the outside wall with stainless steel faceplate
- Stainless steel faceplate
- Deposit cover lock Abloy Classic with 10 keys for deposit customers
- Anti-fishing mechanism
- Standard colour, RAL 7035
- Deposit trap
70 mm (H) x 180 mm (W) x 100 mm (D)

Options and fittings

- The safes can be equipped with electronic codelocks, combination locks or keylocks
- Special grill gate for explosion protection
- Kaso Cinema, camera-monitoring solution for user and deposit process verification
- Optional solutions for deposit verification and security
- Lockable compartments
- Internal fittings and accessories

Specifications

Model	E4-320N	E4-330N	E4-340N
External			
Height (mm)	962	1312	1662
Width (mm)	634	634	634
Depth (mm)	550	550	550
Internal			
Height (mm)	843	1193	1543
Width (mm)	486	486	486
Depth (mm)	364	364	364
Volume (l)	149	211	273
Weight (kg)	500	610	730
Deposit trap height mm (from bottom)	720	1070	1420