

PRODUCT CATALOGUE



KASO[®]
SECURITY - 24 HOURS A DAY



1938 TARKASTELTUJA KASSAKAAPPEJA.
PÄÄLLÄ KASSAKAAPPI OY.

TULI JA VARAS

saapuvat aina odottamatta!

KASSAKAAPPI

suoja rahaa ja arvopaperin näitä kutsumattomilta
"vierailta"



Catalogue content

2

*Fire protection for
documents and data*

8

*Burglary
protection*

20

*Keeps
design safes*

24

*Cash handling
solutions*

30

*Strongrooms and
vaults*

34

*Strongroom and
vault doors*

38

*Safe deposit
lockers*

40

*Security
doors*

44

*Clothes and
locker cabinets*



*More information about
Kaso security solutions.
Please contact sales@kaso.fi
or visit www.kasosafes.com.*

Fireproofed in real life building fires

At Kaso we often open safes damaged in fires around the world. Recently we opened a Kaso safe that had suffered in the forest fires in Greece. The house was burnt down to the stone wall. Opening is always a thrilling and emo-

tional event – we cannot guarantee the state of the contents, if the conditions have exceeded what the safe is designed to withstand. This particular safe model was tested to withstand a heat of 1 000 degrees for one hour,

but according to the owner, the safe had been at least 4-5 hours in above 700 degrees. This time the result made everyone happy: our customer was delighted with the good condition of stationery and keepsakes.



Fireproof FC filing cabinets

NT Fire 017 – 60 Paper



*FC-40E with four drawers,
with panel*

*FC-40C, compact, with four
drawers, without panel*

Key features

- Modern design
- Lightweight filing series
- Fire protection 60 minutes (NT Fire 017 – 60 Paper)
- Two to four drawers
- Adjustable filing rail width

Design

- Adjustable filing rail width
 - suitable for A4, legal, letter, foolscap folio paper sizes
- Supplied with one central keylock on the top drawer
 - all drawers can be locked and opened with a single lock
- Colour light grey, RAL 7035
- Two series available:
 - FC E series with wooden drawer panels
 - FC C series with traditional painted drawers



*Data insert
NT Fire 017 – 60 Diskette
(option)*

Specifications

| Model | FC-20E FC-20C | FC-30E FC-30C | FC-40E FC-40C |
|-------------------|------------------|------------------|------------------|
| Height (mm) | 785 | 1125 | 1470 |
| Width (mm) | 530 | 530 | 530 |
| Depth (mm) | 700 | 700 | 700 |
| Weight (kg) E | 150 | 210 | 270 |
| Weight (kg) C | 146 | 202 | 260 |
| Number of drawers | 2 | 3 | 4 |

Burglaryproof PK-400 fire safes

EN 14450 Grade S1 (ECB-S)
NT Fire 017 – 120 Paper

Key features

- Over half a century of experience in tested fire security products
- Lightweight and modern fireproof storage solution for offices
- Modern design and wide range of models for a variety of storage needs
- 120 minutes fire protection according to NT Fire 017 – 120 Paper (120 minutes of fire testing at temperatures over 1045 °C)
- Burglary protection S1 according to European Standard EN 14450 (ECB-S)
- Security locking system against burglary, theft and unauthorised access



Locking and security

- Four-way locking mechanism consists of sliding locking bolts on three sides and a locking frame structure on the back panel of the door
- PK-400 data safes are supplied with ECB-S certified Mauer keylock as standard – also available with various electronic code or combination lock models
- Option for two locks
- Floor anchoring


Optional fittings

- Adjustable shelves
- Adjustable shelves with filing rails
- Lockable compartments – external height 150 mm or 350 mm
- Pull-out multipurpose drawers and filing rails
- Data Insert MI-400
- Gun accessories



Burglaryproof PK-400 fire safes

EN 14450 Grade S1 (ECB-S)
NT Fire 017 – 120 Paper

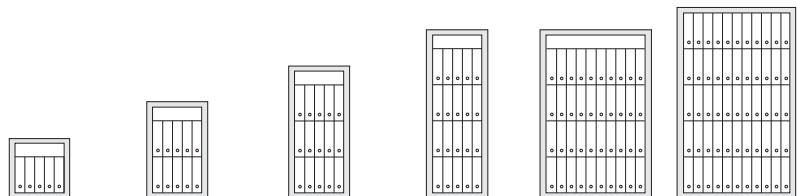

Specifications

| Model | PK-410 | PK-420 | PK-430 | PK-440 | PK-480 | PK-490 |
|------------------------|--------|--------|--------|--------|--------|--------|
| External | | | | | | |
| Height (mm) | 680 | 1030 | 1380 | 1730 | 1730 | 1980 |
| Width (mm) | 670 | 670 | 670 | 670 | 1160 | 1220 |
| Depth (mm) | 580 | 580 | 580 | 580 | 580 | 580 |
| Internal | | | | | | |
| Height (mm) | 490 | 840 | 1190 | 1540 | 1540 | 1790 |
| Width (mm) | 485 | 485 | 485 | 485 | 970 | 1040 |
| Depth (mm) | 360 | 360 | 360 | 360 | 360 | 360 |
| Volume (l) | 87 | 149 | 211 | 273 | 546 | 679 |
| Weight (kg) | 150 | 205 | 260 | 315 | 495 | 565 |
| A4 file capacity (pcs) | 6-9 | 12-18 | 18-27 | 24-36 | 48-76 | 65-100 |

Burglaryproof PK-400 data safes

EN 14450 Grade S1 (ECB-S)
NT Fire 017 – 120 Diskette

Locking and security

- Four-way locking mechanism consists of sliding locking bolts on three sides and a locking frame structure on the back panel of the door
- PK-400 data safes are supplied with ECB-S certified Mauer keylock as standard
 - also available with various other electronic code or combination lock models
- Option for two locks
- Floor anchoring



Tested protection

- Fire protection for data and media records according to NT Fire 017 – 120 Diskette (fire protection for 120 minutes at temperatures of over 1045 °C), (PK-410 Data Safe NT Fire 017 – 90 Diskette)
- Burglary protection S1 according to European Standard EN 14450 (ECB-S)



Design

- Wide range of models and flexible adjustment of the inside fittings allows a variety of uses
- Sealed double door structure for maximum security against fire, heat, magnetism and water
- Standard colour light grey, RAL 7035

Optional inside fittings



- Adjustable shelves
- Pull-out multi-purpose drawers with dividers



Internal dimensions of a multipurpose pull-out shelf:
PK-490 data safe 377 mm x 251 mm x 60 mm.
Other models 344 mm x 251 mm x 60 mm.

Burglaryproof PK-400 data safes

EN 14450 Grade S1 (ECB-S)
NT Fire 017 – 120 Diskette



Specifications

| Model | PK-410 DATA SAFE | PK-420 DATA SAFE | PK-430 DATA SAFE | PK-440 DATA SAFE | PK-480 DATA SAFE | PK-490 DATA SAFE |
|--|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| External | | | | | | |
| Height (mm) | 680 | 1030 | 1380 | 1730 | 1730 | 1980 |
| Width (mm) | 670 | 670 | 670 | 670 | 1160 | 1220 |
| Depth (mm) | 580 | 580 | 580 | 580 | 580 | 580 |
| Internal | | | | | | |
| Height (mm) | 390 | 740 | 1090 | 1440 | 1440 | 1690 |
| Width (mm) | 375 | 375 | 375 | 375 | 755 | 815 |
| Depth (mm) | 260 | 260 | 260 | 260 | 260 | 260 |
| Volume (l) | 39 | 73 | 108 | 142 | 284 | 361 |
| Weight (kg) | 170 | 230 | 300 | 380 | 625 | 725 |
| Capacity (estimate), discs | | | | | | |
| 5.25" magneto-optical disc | 95 | 185 | 280 | 415 | 830 | 920 |
| CD/DVD | 160 | 315 | 470 | 705 | 1405 | 1640 |
| Zip drives | 190 | 380 | 570 | 760 | 1515 | 2355 |
| 3.5" magneto-optical disc | 390 | 905 | 1290 | 1810 | 3615 | 5505 |
| Capacity (estimate), cartridges | | | | | | |
| DLT | 90 | 180 | 270 | 360 | 720 | 900 |
| LTO, LTO Ultrium | 110 | 220 | 325 | 435 | 865 | 1345 |
| Exabyte 8 mm, Travan TR-4 | 195 | 390 | 585 | 780 | 1560 | 1820 |
| AIT | 310 | 615 | 920 | 1225 | 2450 | 3025 |
| DAT | 310 | 715 | 1020 | 1430 | 2860 | 3810 |
| DDS | 435 | 1010 | 1440 | 2020 | 4035 | 4995 |

Pull-out multipurpose drawer inner dimensions (mm): width 340 x depth 250 (models PK-410 – PK-480), width 375 x depth 250 (model PK-490).

Data safe capacity estimates are assuming adjustable shelves as internal accessories.

Individual data cartridge package sizes are manufacturer specific. More information from sales@kaso.fi.

Burglary protection

More and more mobile employees, temporary personnel and visitors pass through office environments and shops. The increase in traffic calls for improved document protection.





Eurosafes

The multi-layer BFP® construction, developed by Kaso, provides invaluable benefits for the construction of safes. Thanks to the innovation, the Kaso E-400 Eurosafe series offers significant weight savings without compromising the security level. The locking mechanism of the E-400 series safes consists of sliding locking bolts on three sides and a locking frame structure on the back panel of the door. The safes are supplied with a floor-anchoring hole and bolt as standard to prevent easy removal of the safe.

Fire- and burglaryproof Eurosafes

The Kaso E-300 series provides strong burglary protection and tested fire protection for 60 minutes. The variety of safe sizes, with container volumes ranging from 87 to 635 litres, ensures a precise match for customer-specific needs. Door panel, colouring and inside fitting options further add to the versatility of the series.

Office safes

Kaso office safes of the PTK-300 series are available in six sizes. The light and slender construction allows for flexible placement in the office – the smallest of the series can even be placed under a desk. Sliding bolts on all four sides of the door protect the contents against unauthorised access and keep the door tightly closed against fire. All safes in the series can be floor-anchored and equipped with a variety of locking options and inside fittings.

Eurosafes E-100 series

EN 1143-1 Grade I (ECB-S)

ECB-S certified and practical Eurosafe for small shops, restaurants, kiosks, offices and homes.

Standard options

- Unpickable keylock, EN 1300 Class A (2 keys)
- Standard colour Dusty Grey, RAL 7037
- Back wall and floor anchoring (1 anchoring bolt)
- Adjustable shelf



Locking options

- Digital code lock



Specifications

| Model | E1-102 | E1-103 | E1-104 | E1-106 |
|-----------------|--------|--------|--------|--------|
| External | | | | |
| Height (mm) | 280 | 280 | 395 | 565 |
| Width (mm) | 400 | 450 | 450 | 450 |
| Depth (mm) | 312 | 442 | 442 | 442 |
| Internal | | | | |
| Height (mm) | 230 | 230 | 345 | 515 |
| Width (mm) | 350 | 400 | 400 | 400 |
| Depth (mm) | 180 | 310 | 310 | 310 |
| Volume (l) | 14 | 29 | 43 | 64 |
| Weight (kg) | 60 | 85 | 100 | 130 |

Eurosafes PTK E-300 series



EN 1143-1 Grade 0 to IV (ECB-S)
 NT Fire 017 – 60 Paper (Grade 0 to III)
 EN 15659 – LFS 30 P (Grade IV)

Key features

- Designed for offices
- Burglary tested and certified according to Euronorm EN 1143-1 Grade 0 to IV (ECB-S)
- Fire protection for 60 minutes according to NT Fire 017 – 60 Paper (Grade 0 to III)
- Fire protection for 30 minutes according to EN 15659 – LFS 30 P (Grade IV)
- Unpickable keylock with two changeable keys as standard (E4 grade with two locks)
- Wide range of locking options and accessories
- Standard colour light grey, RAL 7035
- Easily installed – the smallest size can even be placed under a desk
- Sliding bolts on all four sides of the door protect against burglary attack and keep the door tightly closed in case of fire
- Floor anchoring as standard
- Internal fittings adjustable at 25 mm pitch
- Light weight, all under 1000 kg


Options and fittings

- Combination lock or electronic codelock
- Option for two locks
- Adjustable plain shelf
- Pull-out multi-purpose shelf
- Pull-out suspension file frame
- Pull-out worktop
- Lockable inner box
- Data Insert MI-400
- Pull-out keyrack
- Pull-out key compartment shelf
- Pull-out key shelf
- Full RAL range available for colouring
- Right or left handed opening
- Safety deposit lockers

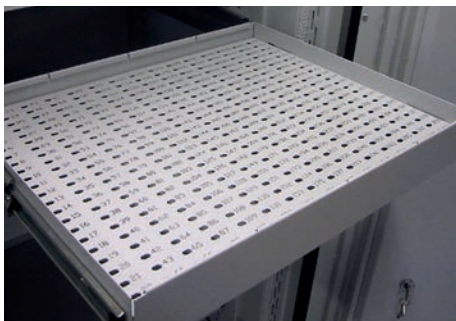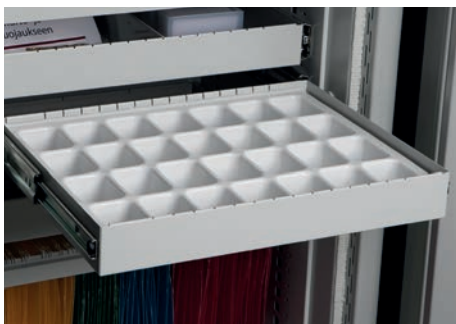

Eurosafes PTK E-300 series

EN 1143-1 Grade 0 to IV (ECB-S)
 NT Fire 017 – 60 Paper (Grade 0 to III)
 EN 15659 – LFS 30 P (Grade IV)

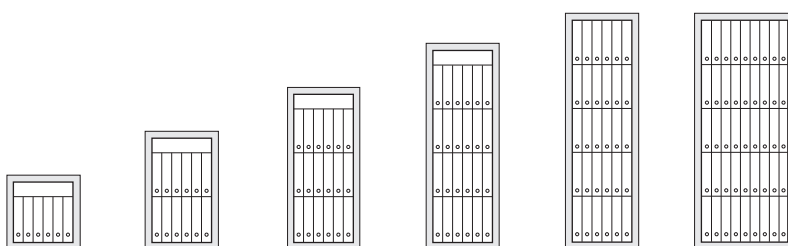

Specifications

| Model | E-310 | E-320 | E-330 | E-340 | E-350 | E-370 |
|------------|--------|--------|--------|--------|--------|--------|
| PTK-SERIES | E1-310 | E1-320 | E1-330 | E1-340 | E1-350 | E1-370 |
| | E2-310 | E2-320 | E2-330 | E2-340 | E2-350 | E2-370 |
| | E3-310 | E3-320 | E3-330 | E3-340 | E3-350 | E3-370 |
| | E4-310 | E4-320 | E4-330 | E4-340 | E4-350 | E4-370 |

External

| | | | | | | |
|-------------|-----|-----|------|------|------|------|
| Height (mm) | 612 | 962 | 1312 | 1662 | 1912 | 1912 |
| Width (mm) | 634 | 634 | 634 | 634 | 634 | 848 |
| Depth (mm) | 550 | 550 | 550 | 550 | 550 | 692 |

Internal

| | | | | | | |
|------------------------|-----|-------|-------|-------|-------|-------|
| Height (mm) | 493 | 843 | 1193 | 1543 | 1793 | 1793 |
| Width (mm) | 486 | 486 | 486 | 486 | 486 | 700 |
| Depth (mm) | 364 | 364 | 364 | 364 | 364 | 506 |
| Volume (l) | 87 | 149 | 211 | 273 | 317 | 635 |
| A4 file capacity (pcs) | 6-9 | 12-18 | 18-27 | 24-36 | 30-45 | 40-70 |
| Weight (kg) E/E1 | 180 | 260 | 340 | 420 | 470 | 650 |
| Weight (kg) E2 | 220 | 300 | 390 | 470 | 500 | 750 |
| Weight (kg) E3 | 250 | 340 | 430 | 530 | 580 | 850 |
| Weight (kg) E4 | 280 | 380 | 490 | 610 | 670 | 970 |

Eurosafes PTK E-300 series

EN 1143-1 Grade II to III (ECB-S)
NT Fire 017 – 60 Paper


Key features

- Burglary tested and certified according to Euronorm EN 1143-1 Grade II to III (ECB-S)
- Fire protection for 60 minutes according to NT FIRE 017 – 60 Paper
- Wide range of locking options and accessories
- Standard colour light grey, RAL 7035



Options and fittings

- Combination lock or electronic lock
- Two locks
- Adjustable plain shelf
- Pull-out multi-purpose shelf
- Pull-out suspension file frame, size A4
- Lockable inner box
- Other RAL colours



Specifications

| Model | E2-308 | E2-309 |
|------------------------|--------|--------|
| PTK-SERIES | E3-308 | E3-309 |
| External | | |
| Height (mm) | 612 | 789 |
| Width (mm) | 570 | 570 |
| Depth (mm) | 500 | 500 |
| Internal | | |
| Height (mm) | 493 | 670 |
| Width (mm) | 428 | 428 |
| Depth (mm) | 314 | 314 |
| Volume (l) | 66 | 90 |
| A4 file capacity (pcs) | 5–8 | 10–16 |
| Weight (kg) E2 | 190 | 260 |
| Weight (kg) E3 | 210 | 290 |


Eurosafes E-300 series

EN 1143-1 Grade II to III (ECB-S)
NT Fire 017 – 60 Paper



Key features

- Burglary tested and certified according to Euronorm EN 1143-1 Grade II to III (ECB-S)
- Fire protection for 60 minutes according to NT FIRE 017 – 60 Paper
- Wide range of locking options and accessories
- Standard colour light grey, RAL 7035
- Standard wooden door panel graphite grey

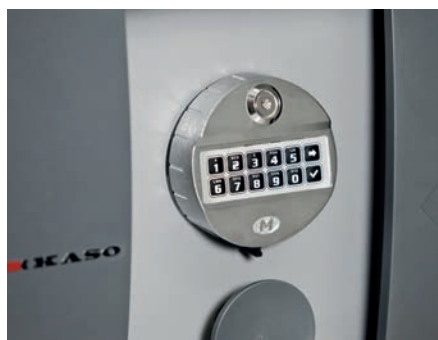

Options and fittings

- Combination lock or electronic lock
- Two locks
- Adjustable plain shelf
- Pull-out multi-purpose shelf
- Pull-out suspension file frame, size A4
- Lockable inner box
- Other RAL colours



Specifications


| Model | E2-308 | E2-309 |
|------------------------|--------|--------|
| E-300-SERIES | E3-308 | E3-309 |
| External | | |
| Height (mm) | 612 | 789 |
| Width (mm) | 570 | 570 |
| Depth (mm) | 560 | 560 |
| Internal | | |
| Height (mm) | 493 | 670 |
| Width (mm) | 428 | 428 |
| Depth (mm) | 314 | 314 |
| Volume (l) | 66 | 90 |
| A4 file capacity (pcs) | 5-8 | 10-16 |
| Weight (kg) E2 | 210 | 260 |
| Weight (kg) E3 | 220 | 300 |

Eurosafes E-300 series

EN 1143-1 Grade 0 to IV (ECB-S)
NT Fire 017 – 60 Paper (Grade 0 to III)
EN 15659 – LFS 30 P (Grade IV)

Key features

- Burglary tested and certified according to Euronorm EN 1143-1 Grade 0 to IV (ECB-S)
- Fire protection for 60 minutes according to NT Fire 017 – 60 Paper (Grade 0 to III)
- Fire protection for 30 minutes according to EN 15659 – LFS 30 P (Grade IV)
- Standard colour light grey, RAL 7035
- Standard wooden door panel graphite grey

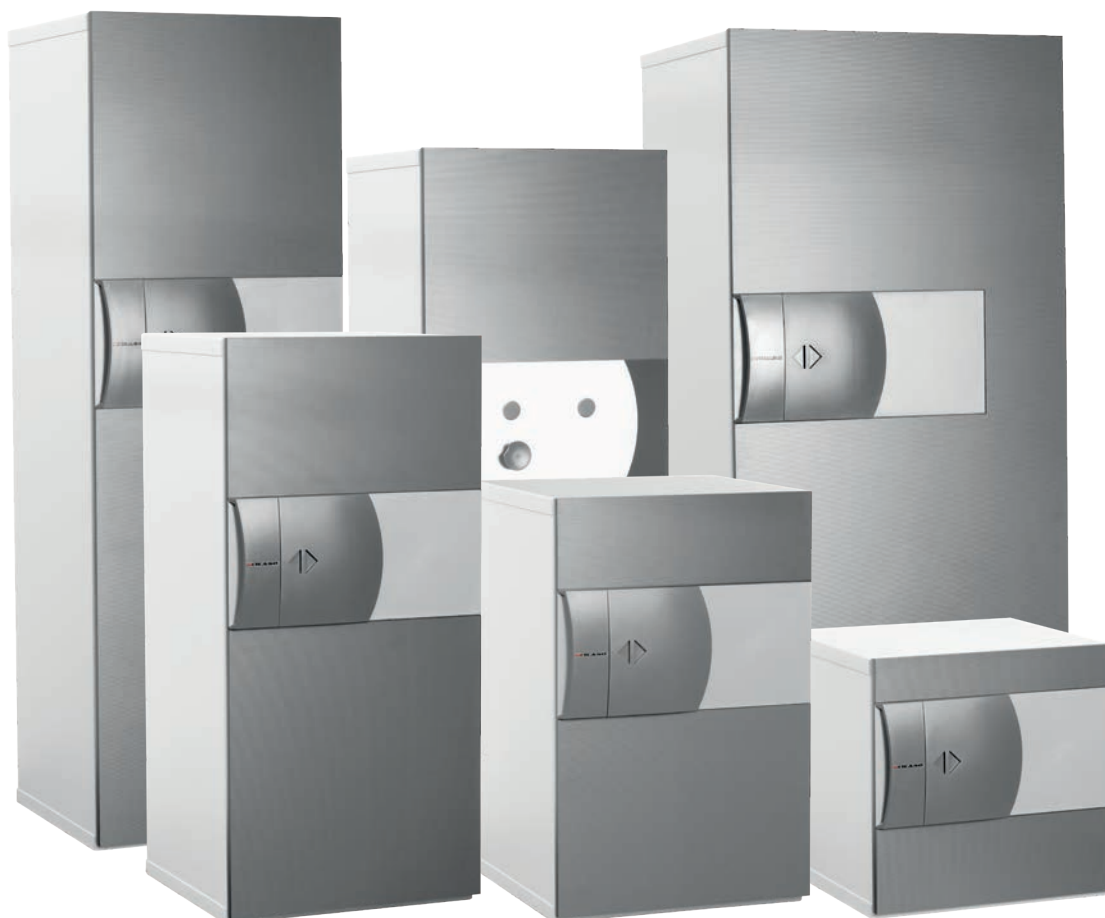


Eurosafes E-300 series

EN 1143-1 Grade 0 to IV (ECB-S)
NT Fire 017 – 60 Paper (Grade 0 to III)
EN 15659 – LFS 30 P (Grade IV)




E-300 Eurosafe with one lock



E-300 Eurosafe with two locks

Options and fittings

- Varos keylock with changeable keys
- Electronic code lock
- Mechanical combination lock
- Panel options and special colours
- Adjustable plain shelves
- Pull-out multi-purpose shelves
- Pull-out worktop
- Lockable inner boxes
- Data Insert MI-400
- Pull-out keyrack
- Pull-out key compartment shelf
- Pull-out key shelf
- Pull-out suspension file frame
- Tested deposit solution
- Safety deposit lockers

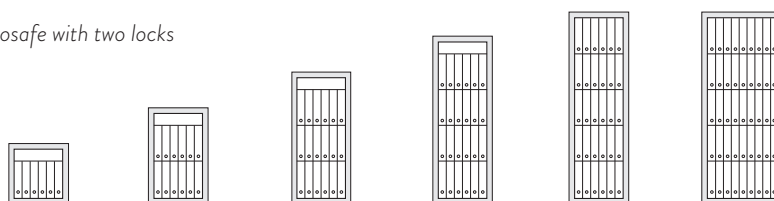

Specifications

| Model | E-310 | E-320 | E-330 | E-340 | E-350 | E-370 |
|------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| E-300-SERIES | E1-310 | E1-320 | E1-330 | E1-340 | E1-350 | E1-370 |
| | E2-310 | E2-320 | E2-330 | E2-340 | E2-350 | E2-370 |
| | E3-310 | E3-320 | E3-330 | E3-340 | E3-350 | E3-370 |
| | E4-310 | E4-320 | E4-330 | E4-340 | E4-350 | E4-370 |
| External | | | | | | |
| Height (mm) | 612 | 962 | 1312 | 1662 | 1912 | 1912 |
| Width (mm) | 634 | 634 | 634 | 634 | 634 | 848 |
| Depth (mm) | 610 | 610 | 610 | 610 | 610 | 752 |
| Internal | | | | | | |
| Height (mm) | 493 | 843 | 1193 | 1543 | 1793 | 1793 |
| Width (mm) | 486 | 486 | 486 | 486 | 486 | 700 |
| Depth (mm) | 364 | 364 | 364 | 364 | 364 | 506 |
| Volume (l) | 87 | 149 | 211 | 273 | 317 | 635 |
| A4 file capacity (pcs) | 6–9 | 12–18 | 18–27 | 24–36 | 30–45 | 40–70 |
| Weight (kg) E0/E1 | 190 | 270 | 360 | 440 | 490 | 680 |
| Weight (kg) E2 | 230 | 310 | 400 | 480 | 520 | 780 |
| Weight (kg) E3 | 260 | 350 | 450 | 550 | 600 | 880 |
| Weight (kg) E4 | 290 | 390 | 510 | 630 | 690 | 1000 |

Eurosafes E5-300 series


EN 1143-1 Grade V (ECB-S)
NT Fire 017 – 60 Paper

Key features

- Certified according to Euronorm EN 1143-1 Grade V (ECB-S)
- Fire protection for 60 minutes according to NT Fire 017 – 60 Paper
- Equipped with two Class B (ECB-S) Varos keylocks as standard
- Wide range of locking options and accessories
- Standard colour light grey, RAL 7035

Options and fittings

- Adjustable plain shelf
- Pull-out multi-purpose shelf
- Pull-out worktop
- Lockable inner boxes
- Pull-out keyrack
- Pull-out key shelf
- Pull-out suspension file frame
- Safety deposit lockers
- Right- or left-handed opening

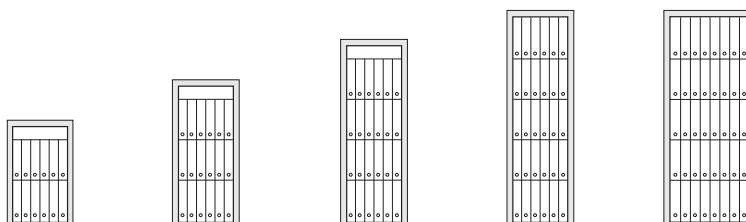

| Specifications | | | | | |
|------------------------|--------|--------|--------|--------|--------|
| Model | E5-320 | E5-330 | E5-340 | E5-350 | E5-370 |
| External | | | | | |
| Height (mm) | 1017 | 1367 | 1717 | 1970 | 1970 |
| Width (mm) | 710 | 710 | 710 | 710 | 920 |
| Depth (mm) | 630 | 630 | 630 | 630 | 770 |
| Internal | | | | | |
| Height (mm) | 840 | 1190 | 1540 | 1790 | 1790 |
| Width (mm) | 486 | 486 | 486 | 486 | 700 |
| Depth (mm) | 364 | 364 | 364 | 364 | 506 |
| Volume (l) | 149 | 211 | 273 | 317 | 635 |
| A4 file capacity (pcs) | 12–18 | 18–27 | 24–36 | 30–45 | 40–70 |
| Weight (kg) | 650 | 850 | 1040 | 1200 | 1440 |



Adjustable plain shelf



Pull-out drawer



Pull-out worktop



Data Insert MI-400



Key insert 350 mm



Pull-out key compartment drawer



Pull-out key drawer



Pull-out filing frame



Tested deposit system



Lockable inner cabinet 350 mm



Gun accessories

Keeps design safes

Our new E-500 series safes combine contemporary Scandinavian design – simplicity, minimalism and functionality – with cutting-edge technology.

In addition to great looks, we also wanted the new E-500 range of safes to be as easy to use as possible. Just enter the code and open the door. To lock the door, you don't need to touch the handle. Push the door closed and the safe is locked.

It takes more than welding sheets together

Kaso's innovative, lightweight multi-layer BFP-Construction® enables manufacturing of light-weight safes without compromising the security level. Weight range of 200 to 340 kilograms means that E-500 series safe can be placed practically anywhere. Safes can be anchored either to the floor or to the wall. Three sizes and two levels of burglary protection meet every need.

Tailormade to your requirements

Standard front panels are smoky brown pear and maple, but other options are available upon request. Should you wish to fine tune the style even further from the stock colours black or white, you can order the safe body painted any RAL colour you desire. Also a variety of optional accessories is available to meet your storage requirements.





Keeps design safes E-500 series

EN 1143-1 grade EURO II and III (ECB-S)
NT Fire 017 – 60 Paper

Strength with beauty

- Scandinavian design with bank security

Light weight

- Possible to install to every office and home

Easy to use

- Enter the code and open the door.
To lock the door, just push the door closed and the safe is locked.

Optional accessories

- Watch winders
- Lockable inner cabinet
- Pull out drawer
- Hideaway shelf for secret papers
- Adjustable metal or glass shelf
- Glass plate on top of the safe



Standard panels

- Smoky brown pear
- Maple

Standard body colour

- Black
- White

Examples of other panel options

- Wenge panel
- Aluminium panel
- Colour painted RAL 9006
- Colour painted RAL 9003



Smoky brown pear



Maple



Wenge panel




Aluminium panel

Colour painted
RAL 9006Colour painted
RAL 9003

| Specifications | | | | | | |
|-----------------|--------|--------|--------|--------|--------|--------|
| Model | E2-507 | E3-507 | E2-508 | E3-508 | E2-509 | E3-509 |
| External | | | | | | |
| Height (mm) | 610 | 610 | 790 | 790 | 940 | 940 |
| Width (mm) | 560 | 560 | 560 | 560 | 560 | 560 |
| Depth (mm) | 565 | 565 | 565 | 565 | 565 | 565 |
| Internal | | | | | | |
| Height (mm) | 490 | 490 | 670 | 670 | 820 | 820 |
| Width (mm) | 440 | 440 | 440 | 440 | 440 | 440 |
| Depth (mm) | 310 | 310 | 310 | 310 | 310 | 310 |
| Volume (l) | 68 | 68 | 94 | 94 | 114 | 114 |
| Weight (kg) | 200 | 230 | 240 | 280 | 300 | 340 |

Examples of design options

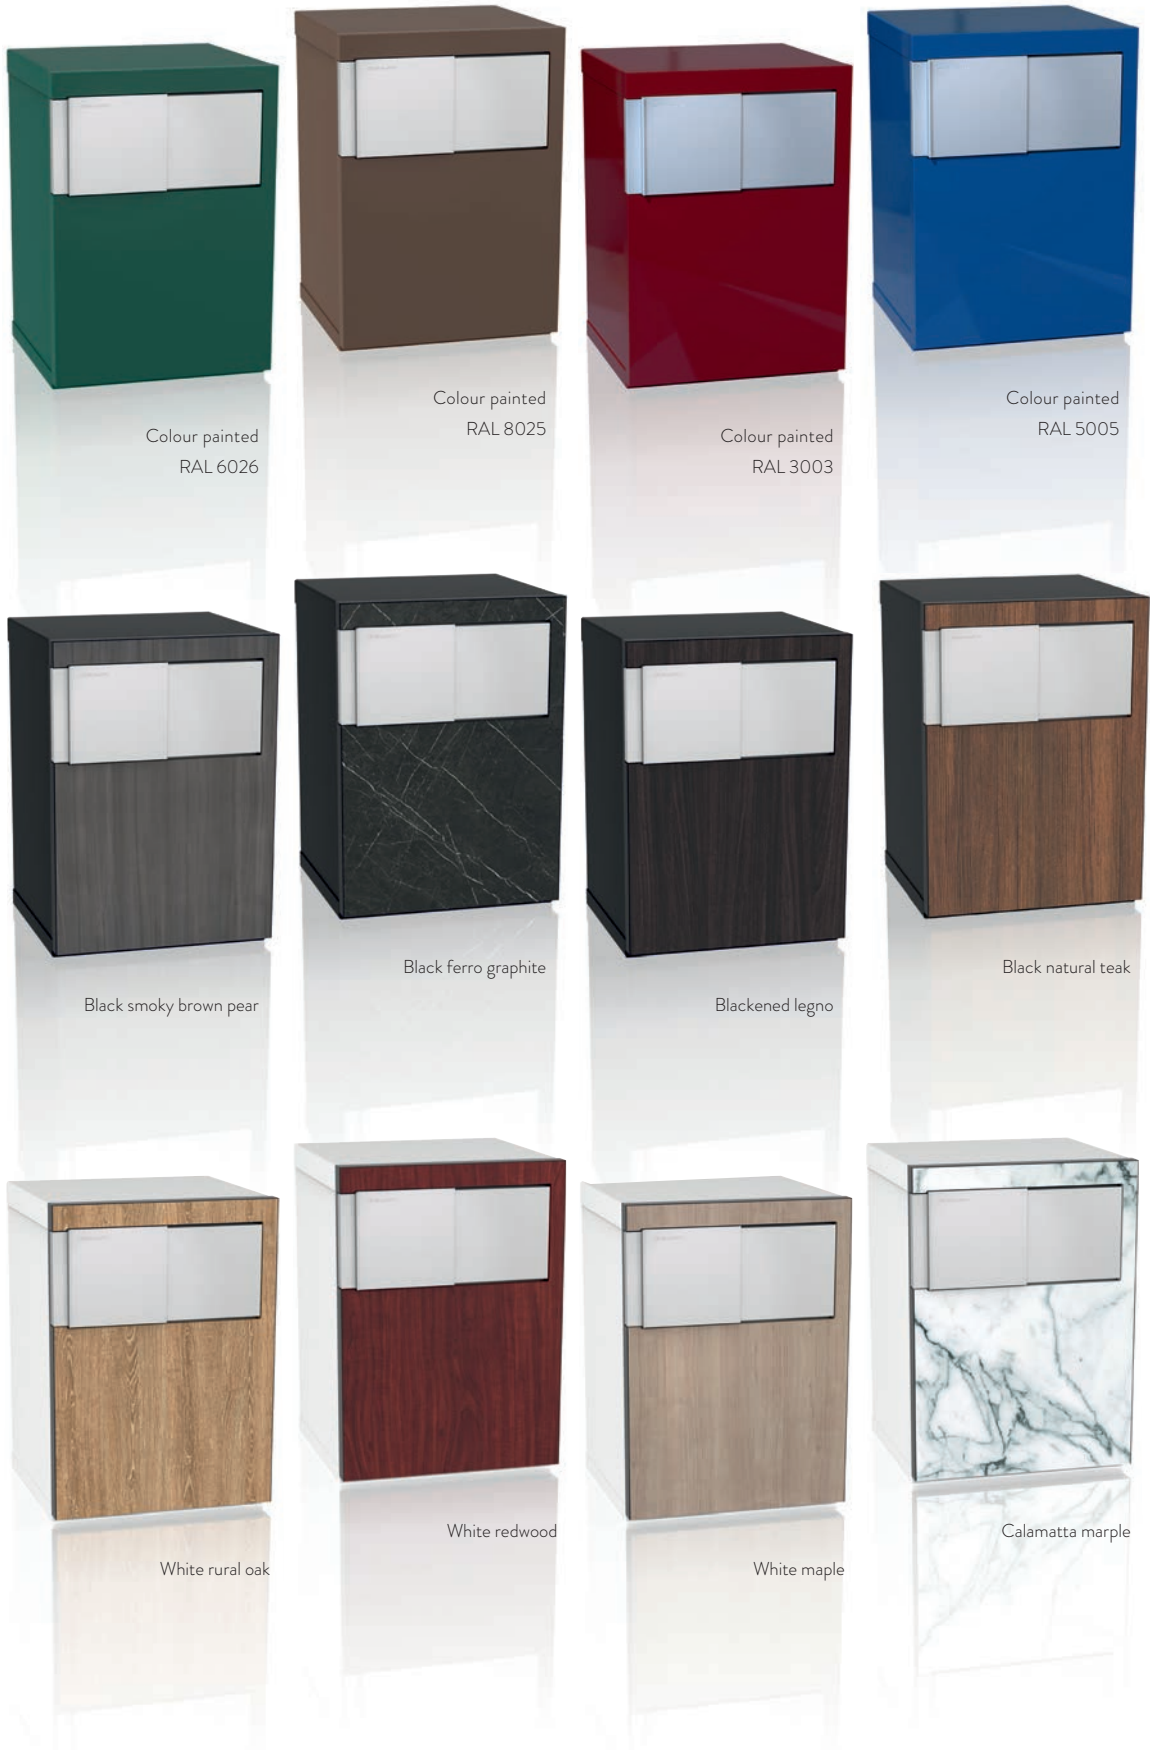



Cash handling solutions

Large volumes of notes, coins and receipts as well as other valuable assets such as keys are handled in shops, service points, offices and banks every day. Securing their safety calls for robust yet functional transit and storage applications.

Temporary cash storage

For cash handling and temporary storage, Kaso KLE-40 cashier boxes offer a convenient yet secure solution. The handles make it easy to move the box into a storage safe when not in use. Alternatively, it can be securely anchored on a desk.

Drop and deposit safes

Adjustable for a range of deposit requirements, Kaso E-400 series drop safes offer a flexible deposit solution for shops, restaurants, banks and cash-service companies. The solution allows for multiple-size deposit packages and variable security levels. A number of locking, compartment and internal fittings are available for customisation according to customer-specific needs.

Kaso PTK-E300 deposit safes are specially designed for use in retail outlets and other environments where money should be stored at all times in a tested safe. With Kaso PTK-E300,

the amount of cash at cashier's desks and service points can be kept to a minimum, which significantly lowers the risks for robbery or hold-ups. The system is designed so that service personnel will not need keys or codes using the deposit. The solution offers a variety of optional features and inside fittings.

Kaso Cinema, a tailor-made surveillance and alarm system, is available for drop and deposit safe solutions for usage monitoring and documentation. The success of the drop is verified by cameras recording every step of the deposit.

Cashier lockers PKL series



Standard options

- 8, 12 or 16 pcs 100 mm lockers, (inc. bottom plate 200 mm and top plate 35 mm)
- Wall thickness 1.5 mm
- Abloy Sentry keylocks
- Locker numbering
- Colour light grey, RAL 7035

Available options

- Lockable rear-door
- Special locker sizes
- Special finishing of the lockers

Specifications

| Model | PKL-8 | PKL-12 | PKL-16 |
|-------------|-------|--------|--------|
| Height (mm) | 1035 | 1435 | 1835 |
| Width (mm) | 453 | 453 | 453 |
| Depth (mm) | 450 | 450 | 450 |

Cash deposit box

VL-180



Cash deposit box VL-180

- For temporary surplus cash deposit
- Fishing prevention
- Keylock or electronic codelock with time-delay
- Guiding plate
- Installation plate

Specifications

| Model | VL-180 |
|-------------|--------|
| Height (mm) | 300 |
| Width (mm) | 180 |
| Depth (mm) | 310 |
| Weight (kg) | 8.5 |

Deposit safes PTK E-300 series

EN 1143-2 Grade III

Key features

- Designed to provide high-security deposit safety in retail outlets and service points
- Certified according to European Standard EN 1143-2 to Grade III
- Specially designed against manipulation
- Floor-anchoring for additional security against removal of the safe
- Limited access to contents of the safe
 - deposit customers have no access into the safe
- Standard colour light grey, RAL 7035
- Maximum deposit bag size:
45 mm (H) x 235 mm (W) x 155 mm (D)
- Right- or left-handed opening
- Rear- or front-facing deposit



Options and fittings

- The safes can be equipped with electronic code locks or combination locks
- Option for two locks
- Deposit drawer keylock
- Kaso Cinema, camera-monitoring solution for user and deposit process verification
- Lockable compartments, shelves and other internal fittings




Specifications

| Model | PTK E3-310 DP | PTK E3-320 DP | PTK E3-330 DP |
|-------------------------------------|---------------|---------------|---------------|
| External | | | |
| Height (mm) | 912 | 1262 | 1612 |
| Width (mm) | 634 | 634 | 634 |
| Depth (mm) | 550 | 550 | 550 |
| Internal | | | |
| Height (mm) | 493 | 843 | 1193 |
| Width (mm) | 486 | 486 | 486 |
| Depth (mm) | 364 | 364 | 364 |
| Volume (l) | 87 | 149 | 211 |
| Weight (kg) Grade III | 490 | 580 | 670 |
| Deposit drawer height (from bottom) | 762 | 1112 | 1462 |

Night deposit safes PTK E-300 series

EN 1143-2 to Grade N-IV (ECB-S)

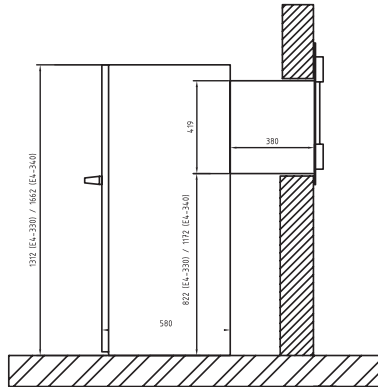

Key features

- Specially designed for banks
- 24-hour surplus cash depositing
- Night deposit safes are tested according to European Standard EN 1143-2 to Grade N-IV (ECB-S)
- Also security grade V available
- The safe has two Varos keylocks
- Floor-anchoring
- Armoured installation frame for easy mounting, wall thickness up to 350 mm
- Lightweight solution thanks to Kaso's BFP® construction
- Easy and fast assembly to the outside wall with stainless steel faceplate
- Stainless steel faceplate
- Deposit cover lock Abloy Classic with 10 keys for deposit customers
- Anti-fishing mechanism
- Standard colour, RAL 7035
- Deposit trap
70 mm (H) x 180 mm (W) x 100 mm (D)

Options and fittings

- The safes can be equipped with electronic code locks, combination locks or keylocks
- Special grill gate for explosion protection
- Kaso Cinema, camera-monitoring solution for user and deposit process verification
- Optional solutions for deposit verification and security
- Lockable compartments
- Internal fittings and accessories

Specifications

| Model | E4-320N | E4-330N | E4-340N |
|--------------------------------------|---------|---------|---------|
| External | | | |
| Height (mm) | 962 | 1312 | 1662 |
| Width (mm) | 634 | 634 | 634 |
| Depth (mm) | 550 | 550 | 550 |
| Internal | | | |
| Height (mm) | 843 | 1193 | 1543 |
| Width (mm) | 486 | 486 | 486 |
| Depth (mm) | 364 | 364 | 364 |
| Volume (l) | 149 | 211 | 273 |
| Weight (kg) | 500 | 610 | 730 |
| Deposit trap height mm (from bottom) | 720 | 1070 | 1420 |

Strongrooms and vaults

Demand for secure storage and archiving of documents, data, and valuables is on the rise due to new legislation as well as distributed and more sophisticated archiving needs. Not only financial institutions but also other organisations and businesses are increasingly required to store material securely – sometimes for days, sometimes for decades.

Archive and vault doors

Kaso archive and vault doors can be installed to a wall of reinforced concrete construction or as part of a prefabricated strongroom. They protect valuable assets against a wide variety of hazards including fire, unauthorised access and forced attacks. The range covers doors tested for varying grades of protection and provides an array of options in terms of emergency exits, locking, alarm sensors and exterior design.

Strongroom elements

Officially tested prefabricated strongrooms have replaced traditional concrete vaults in many banks, companies and institutions. Prefabricated strongrooms are also used in private panic room installations. The increase in their popularity is based on high security, consistent quality and certified burglary resistance. The strongroom scope of supply can also be customised to meet individual project requirements.

Safety deposit lockers

Kaso offers the widest range of standard safety deposit boxes in the market, with two series, SLK-70 and SLK-90, of which the latter has passed tests by the Bankers Association. Both series offer several standard width options and standard lockers. Thanks to a variety of locking options, design alternatives and additional monitoring and deposit management solutions, the deposit locker solution can be fully customised to meet specific needs.



Security rooms

EN 1143-1 Grades I and II
EI 60 Fire Resistance



Prefabricated light weight security and archive rooms are modern physical security solutions especially designed to office and public building installations. Light weight security panels are easily assembled by welding or bolting the elements for example if welding is not allowed. The loadbearing capacities of the building floors are also better utilized leaving more storing capacity to the security room. Prefabricated security and archive rooms are suitable for banks, companies and institutions. Prefabricated security rooms are even popular for private panic room installations.

Light weight security room panels are available with break-in resistance Grade I and II according to EN 1143-1 by ECB-S. The fire protection classification of the security room panels is 60 minutes. The fire protection level could be optionally increased with additional fire protection panels. Security rooms can be supplied with element floors or the elements could be also installed directly on top of existing floor. Surface finishing like painting or installation of decorative panels can be finalized by local contractors enabling the integration of the security room to the surroundings.

Security rooms are customized according to individual project requirements including for example:

- alarm, CCTV and access control systems
- mobile and fixed shelving systems
- additional fire insulation panels
- fire prevention and fighting systems
- bulletproof windows, elements or doors

Strongroom elements EH series

EN 1143-1 Grades I to XII

Supply options

Strongroom scope of supply is customised for meeting individual project requirements including for example:

- internal steel support structures for large/high or two-floor strongrooms
- alarm, CCTV and entrance control solutions
- safe deposit lockers
- emergency doors
- mobile and fixed shelves
- surface finishing options
- fire protection panels
- fire prevention and fire alarm solutions

Planning service

Kaso offers through international distributor network following services to customers, engineering offices and contractors:

- on-site estimates of prefabricated strongroom installation possibilities
- estimates of structural load bearing capacities
- strongroom planning assistance
- strongroom weight estimates
- cost estimates

The exterior measurements of Kaso prefabricated strongrooms can be entirely adjusted according to the customer and installation site requirements.

Installation

The prefabricated strongroom elements are delivered to the installation site where they are quickly assembled for immediate use. It is also possible to relocate a prefabricated strongroom if needed. In addition, the strongroom can be expanded and the vault door position can be moved.

Kaso strongroom advantages

The reason for high success for Kaso prefabricated strongrooms is based on:

- tested, comparable and certified burglary resistance
- high, stable and monitored quality
- relocation possibility of the strongroom
- quality steel finishing on all sides of the elements
- flexible dimensioning
- possibility for reinforcing of existing security rooms
- quick and easy installation
- over 40 years experience with over 1000 strongrooms supplied internationally

Prefabricated strongroom elements

Officially tested prefabricated strongrooms have replaced traditional concrete vaults in many banks, companies

and institutions. Prefabricated strongrooms are even popular for private panic rooms installations. The reason for high success for prefabricated strongrooms is based on high security, stable quality and evaluated burglary resistance proofed by the certification.

Kaso offers wide range of prefabricated strongrooms and archive rooms tested and certified according to European Standard EN 1143-1.

Prefabricated elements are finished with high quality steel panels constituting of different barrier materials depending on the grade of burglary protection and optional explosion or fire protection resistance. Prefabricated elements are attached with indentations, making it extremely difficult to break the structure. The panels are secured by welding or by bolting where welding is not possible nor allowed. Strongrooms can be supplied with prefabricated element or steel plate floors. Surface finishing like painting or cladding can be finalised by local contractors.

| Specifications | | | | | | | | |
|-----------------------------|--|-------|--------|--------|--|---|---------|-----------|
| | Prefabricated strongroom elements with fire protection | | | | Prefabricated high security strongroom elements with fire protection | Prefabricated high-security strongroom elements | | |
| Model | EH-1L | EH-2L | EH-20L | EH-30L | EH-60L | EH-90L | EH-100L | EH-120L |
| Grade EN 1143-1 | I | II | II | III | VI EX | IX EX CD | X EX CD | XII EX CD |
| Fire protection | EI60 | EI60 | EI120 | EI60 | EI60 | - | - | - |
| Thickness (mm) | 76 | 76 | 120 | 120 | 120 | 125 | 150 | 250 |
| Weight (kg/m ²) | 90 | 120 | 185 | 335 | 350 | 405 | 480 | 780 |

Strongroom elements EH series

EN 1143-1 Grades I to XII

Safe or panic rooms

A safe room or panic room is a fortified security room usually installed in private residences and business or public administration buildings.

The main object for security rooms is protecting the people of the premises against break in, home invasion and other threats.

Security room includes minimum prefabricated walls and door against break in, fire and even explosions. Optionally safety rooms could additionally include prefabricated ceiling and floor. Kaso safety room elements

are available to break in classes I to XII according to European Standard EN 1143-1.

Security rooms can be hidden behind many household features, such as mirrors, wardrobes, bookcases, sliding bookcases.

Very often break in resistance of the building is simultaneously complemented with tested security doors (EN 1627) visually matching usual outside and entrance doors.

Security rooms usually contain communications equipment for emergency situations. Some safe

rooms may also have externally vented ventilation systems.

There may also be able to monitor external security cameras and alarm systems. In basic safe rooms, a peephole in the door may be used for a similar purpose.

Safe rooms are typically equipped with basic emergency and survival items such as a flashlight, blankets, a first-aid kit, water, packaged food, self-defense tools, a gas mask, and a simple portable toilet.



Room view with entrance to the panic room behind the mirror



Panic room integration into the apartment.

Vault doors VD series

EN 1143-1 Grades I and II

EI 60 Fire Resistance

Security room doors

Break-in classification of standard security room doors is I or II according to EN 1143-1 by ECB·S. Fire classification of standard security room doors is 60 minutes.

Kaso security room doors are offering premium break-in resistance compared to standard industrial fire doors – four sided security construction including locking bolts on four sides and a dedicated, composite security barrier against multiple and modern forms of attack.

Security room doors are also supplied with high security locking mechanism including burglary certified high security locks. Security room doors are available with various locking and accessory options for specific security and operational requirements.

Optionally the security rooms could be supplied with standard industrial fire doors or bulletproof doors. Private panic rooms could be also supplied with decorated, conventional security doors enabling integration of the security room to the surroundings



Kaso Archive doors

VD-A is an archive door with 120 minutes fire protection (EI 120 fire rating). VD-A archive door offers premium burglary resistance compared to standard industrial fire doors – four sided security construction including locking bolts on three sides and fixed back bolt bank. Archive doors are also supplied with high security locking mechanisms including burglary certified locks. VD-A archive door is intended to be used with EH-20L and EH-30L archive rooms. Due to modern design, the archive door can be also installed to modern office environment.

Archive and Vault, strongroom door options

- lock-, bolt-, door micro switches
- preparation for alarm connection
- motor lock for entrance control
- electronic Paxos compact locking system
- mechanical combination or electronic code lock
- day gate
- door stopper
- seismic detector
- re-locking solution
- stainless steel design



Vault doors VD series

EN 1143-1 Grades II to XII
EI 120/ EI 60 Fire Resistance
(EH-20L to EH-60L models)



Kaso Vault doors

Kaso vault doors are burglary certified to grades III, V, VI, IX, X and XII according to European Standard EN 1143-1. Vault doors VD-3, VD-5 and VD-6 are also offering 120 minutes fire protection according to EI 120.

The doors can be used on their own, installed to the concrete wall or as part of prefabricated strongrooms. Vault doors can be also installed to offices where the look of a fire door does not match the rest of furnishings. Wide range of options are also available for Kaso vault doors for meeting the specific design and security requirements of the installations.

Standard equipment

| Model | VD-A | VD-2 | VD-3 | VD-3L | VD-6 | VD-9 | VD-10 | VD-12 |
|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Number of movable locking bolts | 7 | 8 | 7 | 12 | 7 | 12 | 5 (large) | 6 (large) |
| Fixed back bolt bank, entrance 896 x 1936 | yes | - | yes | - | yes | yes | yes | yes |
| Number of keylocks (Class) | 1 (A) | 1 (A) | 1 (B) | 1 (B) | 2 (C) | 2 (C) | 2 (C) | 3 (C) |
| Maximum number of locks | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| Burglary resistance | - | II | III | III | VI EX | IX EX CD | X EX CD | XII EX CD |
| Fire resistance (min) | 120 | 60 | 120 | - | 120 | - | - | - |
| Barrier/door thickness (mm) | 120/193 | 62/124 | 120/193 | 62/124 | 120/193 | 154/224 | 220/285 | 300/365 |
| Entrance W x H (mm) | 898x1940 | 900x1940 | 898x1940 | 896x1936 | 898x1940 | 910x1960 | 910x1960 | 910x1960 |
| Installation clearance W x H (mm) | 1200x2150 | 1200x2150 | 1200x2150 | 1200x2150 | 1200x2150 | 1310x2170 | 1430x2220 | 1430x2220 |
| Weight (kg) | 320 | 320 | 450 | 400 | 800 | 1400 | 2000 | 2800 |
| Colour light grey, RAL 7035 | yes | yes | yes | yes | yes | yes | yes | yes |

Vault doors with emergency doors

EN 1143-1 Grades III to VII

Kaso Emergency Doors

Emergency doors are installed as a secondary entrance to the vault. The emergency door enables strongroom access in case of operating failure of the main vault door and the vault operation can be continued until the main vault door has been repaired. Emergency Doors are manufactured to Grades III, V, VI and IX according to European Standard EN 1143-1 and are offering comparable security level as the main vault doors. Emergency door could be supplied with similar options as the vault doors for convenience of operation.

The emergency doors can be used on their own, installed to concrete wall or as part of prefabricated strongrooms as a secondary access. They can be also integrated to the main vault door for optimising the installation area of the door on the walls and then maximising the storage capacity inside the vault. The outside entrance is also more conveniently arranged. The vault doors with integrated emergency doors are manufactured according to EN 1143-1. The external dimensions and passage/clearance of the vault doors with integrated emergency doors are the same as the standard vault doors without emergency doors.



Grill Gate with Integrated Emergency Grill Gate



VD-3 Vault Door with Integrated Emergency Door

Standard equipment

| Model | VD-3E | VD-3EL | VD-6E |
|-----------------------------------|-----------|-----------|-------------|
| Movable locking bolts (pcs) | 7 | 12 | 7 |
| Fixed back bolt bank | yes | - | yes |
| Number of keylocks (pcs) (Class) | 1+1 (B) | 1+1 (B) | 2+2 (C) |
| Maximum number of locks (pcs) | 3 | 3 | 3 |
| Manufactured to EN1143-1 | Grade III | Grade III | Grade VI EX |
| Barrier/door thickness (mm) | 120/193 | 62/124 | 120/193 |
| Entrance W x H (mm) | 898x1940 | 896x1936 | 898x1940 |
| Installation clearance W x H (mm) | 1200x2150 | 1200x2150 | 1200x2150 |
| Weight (kg) | 450 | 450 | 800 |
| Colour light grey, RAL 7035 | yes | yes | yes |

Emergency vault doors

EN 1143-1 Grades II to VIII



Kaso emergency doors

- supplied with certified high security bank level locks and locking systems
- protection against latest and most advanced testing methods and tools
- specific protection for critical parts of the doors, locks and locking systems

Standard equipment

| Model | VDE-3 | VDE-6 | VDE-8 |
|-----------------------------------|-----------|-------------|---------------|
| Movable locking bolts (pcs) | 8 | 7 | 6 |
| Fixed back bolt bank | - | yes | yes |
| Number of keylocks (pcs) (Class) | 1 (A) | 2 (C) | 2 (C) |
| Maximum number of locks (pcs) | 3 | 3 | 3 |
| Manufactured to EN1143-1 | Grade III | Grade VI EX | Grade VIII CD |
| Barrier/door thickness (mm) | 62/125 | 120/193 | 155/225 |
| Entrance W x H (mm) | 502x852 | 600x1040 | 650x1090 |
| Installation clearance W x H (mm) | 850x1090 | 910x1210 | 1060x1310 |
| Weight (kg) | 120 | 340 | 700 |
| Colour light grey, RAL 7035 | yes | yes | yes |

Safe deposit lockers SLK series

Widest range of standard safe deposit lockers

- Two safety deposit locker models SLK-70 and SLK-90
- Three standard widths are available in both models
- Wide selection of standard locker heights
- Available with mechanical keylocks or electronic locking

Flexible customer specific solutions

- Special locker and column sizes
- Special colours and finishing

Quality and security

- Manufactured in accordance with ISO 9001:2015 in Helsinki, Finland
- SLK-90 Safety Deposit Lockers tested by Bankers Association



Electronic locking

- All doors supplied with an electronic lock and a mechanical Abloy Sentry keylock
- Operation of the lockers either by self-service mode or by traditional bank assisted opening
- Identification with PIN, ID cards or biometric readers
- Deposit management with audit trail

Electronic deposit system advantages

- All safety deposit boxes are equipped with one keylock and one electronic lock
- Opening of the electronic lock by the bank operator or by the customer in self service system
- Opening of the keylock by customer's personal key
- Proximity card, personal pin code or biometric identification options
- Unique biometric identification requires both the registered customer and the key for opening the safety deposit box
- Safety deposit boxes and entrance to the safety deposit room can be operated by the bank operator or alternatively as a self service system
- In self service system bank operators are not needed for opening the doors or opening the electronic locks of the safety deposit boxes
- Only one customer allowed to enter the safety deposit room at once
- Comprehensive reporting including safety deposit box renting status, useractivities and system information

Safety deposit lockers SLK series



Key features

- Abloy Sentry or Euro-Locks keylocks
- Designed for individual storage of personal valuables
- Available in three standard widths
- Wide selection of standard lockers
- SLK-90 Safety Deposit Lockers tested by Bankers Association
- Total door thickness
 - SLK 70 series 11 mm
 - SLK 90 series 16 mm

Options and fittings

- A variety of locking options
- Options for camera-monitoring (CCTV) and deposit management solutions
- Electronic deposit management solution
- Inner boxes for SLK-70 and SLK-90 models
- Padlocks for inner boxes
- Pull-out trays for SLK-70 and SLK-90 lockers
- Stainless steel-plate doors
- Customer-specific locker and column sizes
- Customer-specific colours and finishing

Standard equipment

| Model | SLK-70 SLK-90 | SLK-75 SLK-95 | SLK-79 SLK-99 |
|---------------------------------|------------------|------------------|------------------|
| <i>External</i> | | | |
| Height, mm | 2000 | 2000 | 2000 |
| Width, mm (Mechanical keylocks) | 303 | 453 | 603 |
| Width, mm (Electronic locking) | 330 | 480 | 630 |
| Depth, mm | 460 | 460 | 460 |

Security doors

KasoGuard security doors are designed for private houses, apartments and offices. They are designed for entrance and inside installations and are suitable both for renovation and new buildings.

The look of KasoGuard security doors is similar to other entrance and inside doors, the inside of the door is what makes it unique.

KasoGuard security doors and frames are steel reinforced offering real protection for what and whom you are valuing the most. The security doors are burglary tested and certified to class 3 (EN1627/ SSF-Sweden). They are also offering protection against fire (class EI45). Additionally the security doors provide tested sound and temperature insulation for additional comfort.

KasoGuard security doors are made to order. The doors can be also tailor made to meet specific size, furnishing, locking and surface requirements.

KasoGuard security doors are often recommended by insurance companies.



Against burglary and fire

Helsinki housing co-operative chose security doors

Security doors are gaining popularity in apartments, but also in detached houses. The new buildings are equipped with security doors.

Emilia Larke, the Chairman of Pyynikintie 1 housing co-operative in Helsinki, is more than happy with their decision. In addition to safety, the new doors also raise the comfort of living. "Security doors are now in," she says.

Built in 1975, the house has 91 apartments which originally had wooden doors. In many cases, the doors were in poor shape and approximately 20 doors required instant attention.

"Doors were twisted and difficult to close. Especially the corners were so deformed that you could see through them. We had changed already a couple of doors and some had been temporarily fixed," Emilia Larke says.

However, the biggest concern was safety.

"Renewal of doors was first discussed a couple of years ago. Because there were so many doors to repair, we concluded that it's better to change all the doors in one go, rather than fix them one at a time. In the annual general meeting 2014 we decided to change all the old doors to security doors," Larke says.

During the process, many options were considered. Ordinary wooden doors were one of them, although it was quickly evident that they didn't meet the needs of tenants. The benefits of security doors were what they were looking for.

"The process opened up our eyes on what could have happened. The feeling of safety has increased," Larke adds.

Luckily there haven't been burglaries in Pyynikintie 1 so far.

"An ordinary wooden door with a safety lock can be broken with a crow bar in less than 30 seconds. The Kaso steel frame and door leaf are tested according to EN-1627 standard," Kaso's Sales Manager **Teija Paakkari** claims. Thanks to its structure and locking, crow bars are useless against a Kaso security door.

The feedback has been positive. One of the tenants said that she now feels safe. And another can stay at his summer cottage for a longer period of time without worry.

The Chairman Larke considers that the price difference between an ordinary door and a security door is only modest. "They are totally different doors. You really get what you pay for."

Enhanced fire safety

Thanks to fire seals, fire certified security doors offer better protection when compared to ordinary wooden doors.

"Our security doors resist fire for 45 minutes, while the minimum requirement is 30 minutes," Paakkari argues.

Also the 35 year old locks were changed.

"The keys were from the last century and we had lost track on who has them," Emilia Larke says.

The new doors are equipped with mechanical locks, while electronic locking systems are also available.

Strong steel frame and bolts

Insulated with rock wool, the frame of the door and door leaf are steel reinforced. In addition to steel frame, the door is protected against burglary with bolts on all four sides of the door. Door panels fine-tune the appearance.

According to Teija Paakkari, a security door can be installed into an old door opening, even though a reinforcement might be needed. And if there are separate frames for inner and outer doors, the old inner door can be left in place. However, with a security door there is no need for inner door.

Better sound insulation

Emilia Larke says that although the doors are robust, they are easy to use.

"From users' point of view, it's just like an ordinary wooden door. The sounds from the stairway are effectively muted. Because the inside of the door is light coloured, it lightens up the hallway. The colour also fits perfectly to most decoration styles," Larke says.

Interest is on the rise

According to Teija Paakkari, security doors have been gaining popularity not only in apartments, but also in detached houses.

Security doors

Burglary protection EN 1627 Grade 3

Fire protection EI30

Key features

- Private houses, apartments and offices
- Inside and entrance installations
- New and renovation buildings
- Steel reinforced door and frame
- Outwards or inwards opening (“push” or “pull”)
- Right or left handed opening
- Bolting on four sides
- Integral locking system with drill protection
- Standard locking options Mottura and Abloy

Options and fittings

- Door bell
- Letter box
- Viewing spot
- Access control
- Electronic locking
- Integrated door opening limiter
- Colour, panel and furnishing options
- Tailor made size and design options



Fixed rear bolting



Mottura keylock

Classifications

| | |
|-------------------------------|-------------------|
| Certified burglary protection | Grade 3 (EN 1627) |
| Fire protection | EI 30 |
| Sound insulation | 42Rw |
| Resistance to wind load | Class C5 |
| Air permeability | Class 4 |
| Water tightness | Class 9A |

Security doors

Burglary protection EN 1627 Grade 3

Fire protection EI30



Top locking bolt



Stainless steel threshold

Specifications

| | | |
|-------------------------------------|----------|-----------|
| Size | 9x21 | 10x21 |
| Installation clearing W x H (mm) | 910x2110 | 1010x2110 |
| Frame W x H (mm) | 890x2095 | 990x2095 |
| Entrance W x H (mm) | 780x2020 | 880x2020 |
| Weight (kg) | 95 | 100 |
| Burglary resistance class (EN 1627) | 3 | 3 |

Clothes and locker cabinets



Clothes and locker cabinets can be used anywhere where lockable storage space is needed. They are suitable, for example, for industrial facilities, companies, shops, bureaus, hospitals, schools, gyms, sports halls, swim halls and health clubs. Kaso has manufactured clothes cabinets for over 50 years.

Clothes and locker cabinets

Durable and good-looking, Clothes and locker cabinets combine ease of use with safety and stylish design. The cabinets are available with a flat or sloping roof. Air-conditioning and double doors are available on request.

Choose your design

- **Pro**
Economical and robust steel Pro doors are stronger and more bending-resistant than traditional flat steel doors.
- **Classic**
Durable and solid steel doors equipped with a three-point locking system (top, bottom and side).
- **Green**
MDF doors available with various colours and a one-point locking system.
- **Trend**
Laminated door with a choice of colours and a one-point locking system.
- **Solid**
Prestige doors made of massive Karelian pine boards with lacquered, stained or painted surface.

Model Z clothes cabinets

Kaso Model Z clothes cabinets are a space-saving solution for locations where limited space prevents the installation of regular-sized cabinets. A wide selection of door materials, including steel plate and laminate, is available as well as several options for customisation.

Locker cabinets

Locker cabinets are suitable for shops, schools and other spaces, where personal items such as laptops, mobile phones and purchases need to be safely stored for a while.

As an example about locker cabinets, the Kaso Laptop locker with eight lockers, features recharging for devices such as mobile phones, personal computers and cameras in individual lockers.

Lockers



Key features

- ISO 9001:2008 certificate
- SFS 5340 standard
- Awarded design
- Designed to be used anywhere where lockable storage space is needed

All compartments of clothes and locker cabinets include

- Hat shelf
- Clothes rail with three movable hooks
- Two towel hooks on the steel door
- Ventilation
- Padlock mechanism for users' personal locks, or a permanent lock

Options and fittings

- Wall mounting for the cabinet and the bench
- Abloy serial lock
- Eurolock serial lock
- Deposit/coin-operated lock
- Master key
- Bench constructed from laminated board, steel or lacquered pine boards
- Removable spacing plate
- Ventilation duct
- Sloping roof
- Adjustable feet



Accessories

- Mirror
- Accessory pocket
- Frame for a name plate
- Key diecutting for department numbering
- Shoe rack

Specifications

| Cabinets | 1 | 2 | 3 | 4 |
|------------------------------|-----------|-----------|-----------|-----------|
| Cabinet depth (mm) | 525 | 525 | 525 | 525 |
| Cabinet height (mm) | 1900/2050 | 1900/2050 | 1900/2050 | 1900/2050 |
| Unit width (mm) | 300 | 600 | 900 | 1200 |
| Number of doors/users | | | | |
| Clothes cabinets | 1 | 2 | 3 | 4 |
| Z cabinets | 2 | 4 | 6 | 8 |
| Locker cabinets | 2-8 | 4-16 | 6-24 | 8-32 |
| Unit width (mm) | 400 | 800 | 1200 | - |
| Number of doors/users | | | | |
| Clothes cabinets | 1 | 2 | 3 | - |
| Z cabinets | 2 | 4 | 6 | - |
| Locker cabinets | 2-8 | 4-16 | 6-24 | - |



Kaso is made in Finland. We offer internationally certified products and services for property and information protection. For over a century private citizens, banks, institutions and companies around the world have relied on the high Kaso-quality products and services. We combine our professional knowledge in security products with new and innovative technological solutions and modern designs.



All rights for alterations reserved.